

(21) (A1) 2,129,848
(88) 1993/02/08
(43) 1993/08/19

(51) Int.Cl. ⁵ C01B-013/11

(19) (CA) APPLICATION FOR CANADIAN PATENT (12)

(54) Ozone Generator Having an Electrode Formed of a Mass of Helical Windings and Associated Method

(72) Mausgrover, Robert H. - U.S.A. ;
McEarchern, Dennis H. - U.S.A. ;

(71) O-Three Limited - U.S.A. ;

(30) (US) 832,989 1992/02/10

(57) 47 Claims

5,093,6/37

Notice: This application is as filed and may therefore contain an incomplete specification.



BEST AVAILABLE COPY

OZONE GENERATOR HAVING AN ELECTRODE
FORMED OF A MASS OF HELICAL WINDINGS
AND ASSOCIATED METHOD

Field of the Invention

This invention relates to the field of ozone generators, and more particularly, to an ozone generator for producing a high concentration of ozone gas from an electrical corona discharge and associated method.

5

Background of the Invention

Ozone is one of the most powerful oxidizers and disinfectants available. Ozone not only kills bacteria, but also inactivates many viruses, cysts and spores. In addition, ozone oxidizes many organic chemical compounds, including chloramines, soaps, oils and other wastes thereby rendering them harmless to the environment. Accordingly, ozone may be used for a number of purposes including: drinking water purification, waste water treatment, air purification and sterilization, and a variety of medical uses.

10

15

Ozone is typically generated by one of two methods. Ultraviolet lamps operating at a wavelength of between 180-190 nanometers may be used to produce ozone in ambient air. Ozone may also be generated by creating an electrical corona discharge between two energized electrodes in ambient air or in another oxygen containing gas. The electrodes are typically

20

separated by a dielectric material, such as a glass or an air gap separation may be provided. The corona discharge is an ionization of the air and is visually indicated by the presence of a pale violet or bluish color in the area between and surrounding the electrodes.

Because ozone has a half-life of only about 22 minutes in ambient air before dissociating back to oxygen, a process requiring ozone must have an ozone generator in close proximity to the desired point of application of the ozone. Thus, an ideal ozone generator is desirably compact, relatively simple in construction, consumes little electricity, and produces little waste heat while producing a high concentration of ozone.

The prior art has developed a number of ozone generators based on the electrical corona discharge process for producing ozone. A wide assortment of electrode configurations have been developed to try to improve the performance of the basic corona discharge ozone generator. For example, an ozone generator electrode formed from a planar wire mesh or screen is known in the art. For example, U.S. Patent No. 2,658,868 to Collison discloses a cylindrical ozone generator wherein both the inner and outer electrodes are preferably constituted of concentrically disposed wire screens separated by a dielectric tube. Similarly, U.S. Patent No. 4,035,657 to Carlson discloses an ozone generator having concentric electrodes formed from planar rectangular sheets of stainless steel wire mesh screen.

Two U.S. Patents to Bridge, Patent Nos. 832,768 and 935,457, disclose a cylindrical surface electrode having openings therein permitting the flow of a gas through and transverse to the electrode. The Bridge patents teach various electrode surface configurations including a perforated tubular shape, a

rectangularly perforated shape, and a wire mesh. U.S. Patent No. 788,557 to Sahlstrom discloses planar or concentrically positioned electrodes separated by a dielectric, and the electrodes having either pointed raised portions or being formed of a wire gauze.

The prior art also includes ozone generator electrodes having raised portions on the electrode surface. For example, Saylor discloses, in U.S. Patent No. 4,214,995, an ozone generator having a plurality of electrode sets, each set having a dimpled inner electrode in a sealed dielectric and surrounded by an outer electrode spaced from the inner electrode to permit a flow of air therebetween. U.S. Patent No. 4,062,748 to Imris discloses a bipolar grid shaped electrode wherein the bipolar and discharge electrodes have surfaces with sawtooth or needle-shaped points.

Smooth or flat electrode surfaces are disclosed, for example, in U.S. Patent Nos. 4,213,838 and 4,090,960 to Lowther and Cooper, respectively. The Lowther patent discloses a corona reaction chamber for producing ozone, wherein excess heat is carried away from the system by a gas flow therethrough, and wherein the electrodes are closely spaced flat plates. The Cooper patent discloses an apparatus for forming ozone and injecting it into a flow of liquid. The Cooper patent discloses two electrodes separated by a porous sheath filter whereby ozone generated from a tubular smooth inner electrode is passed through the sheath, as it is formed, and out into the liquid.

"Filled" electrodes for ozone generation are also known in the art wherein the electrode is formed of a mass of filling material. For example, Kuhlenschmidt, in U.S. Patent No. 1,437,760, discloses an ozone generator having a concentric series of evacuated and sealed glass structures containing each electrode. Passageways between the glass structures permit fluid flow therethrough. The Kuhlenschmidt

evacuated glass structure electrodes are filled with a material, such as loosely arranged metal chips, coarse metallic fillings and wire chips, interlacingly arranged pieces of wire gauze, or leaden shot having a spherical diameter of about one millimeter.

U.S. Patent No. 4,351,734 to Kauffman discloses an ozone generator for treating a waste-bearing liquid by passing air through an electrode bed in the liquid. The Kauffman electrode bed consists of two mesh grids with a packing of aluminum shot therebetween. Castor, in U.S. Patent No. 3,023,155, discloses a cylindrical ozone generator having an inner electrode consisting of a tube with passages for the flow of air therethrough and further surrounded by a mass of aluminum granules preferably of the order of fifty to twenty-five thousandths of an inch in size. The aluminum particles of the Castor electrode are each insulated from one another by the formation of an oxide coating thereon.

Other attempts have been made to modify the basic electrical corona discharge ozone generator to achieve greater ozone conversion efficiency and/or greater energy consumption efficiency. For example, U.S. Patent No. 4,417,966 to Krauss et al. discloses an ozone generator having a glow discharge chamber in which an electrode is located and in which a gas, such as neon, is adapted to be ionized by an electric field produced by a voltage pulse at a frequency of from ten to sixteen KHz. Thus, in Krauss the entire glow discharge chamber functions as inner plasma electrode and the outer electrode has a net-like form. Masuda discloses, in U.S. Patent No. 4,614,573, an ozone generator which first compresses then cools the oxygen-containing gas before passing it between a pair of electrodes -- the inner electrode formed of a series of linear electrodes on the inner surface of a cylindrical dielectric tube.

It is also known in the art to increase the concentration of oxygen in the gas subjected to the electrical corona discharge, or to cool the oxygen containing gas, to thereby increase ozone production efficiency. Ozone generators which require pure oxygen or supplemental cooling are likely to be relatively complicated and typically require frequent and expensive maintenance. To compensate for low conversion efficiency, a number of generators may also be configured in tandem to produce the required amount of ozone. Alternately, larger ozone generating units may be used to produce a required amount of ozone.

Despite the numerous beneficial applications for ozone, and despite repeated attempts in the prior art to produce an efficient ozone generator, a mechanically and electrically simple and rugged ozone generator has not heretofore been developed. The prior art ozone generators have typically produced a relatively large amount of excess heat and have failed to produce a high concentration of ozone.

Summary of the Invention

It is therefore an object of the present invention to provide an ozone generator that efficiently produces a high concentration of ozone with little excess heat.

It is another object of the present invention to provide an ozone generator that is mechanically and electrically simple, and that is also rugged and reliable and requires minimum continuing maintenance.

It is a further object of the present invention to provide an ozone generator that is physically compact and which efficiently uses electrical energy.

These and other objects of the present invention are provided by an electrically powered ozone generator including a dielectric tube separating two

electrodes adapted to be connected to a high voltage power supply, wherein the inner electrode is formed of a mass of helical windings of electrically conductive material. The mass of helical windings occupies a
5 portion of the interior of the dielectric tube underlying an outer electrode. The mass of helical windings is permeable to the flow of gas therethrough and has a series of curved surfaces thereon for creating an electrical corona. The electrical corona
10 generates ozone in the presence of an oxygen containing gas, such as air.

The helical windings are preferably formed of strips of electrically conductive material and preferably have a radius of curvature of not more than
15 about one quarter of an inch. The mass of helical windings may be provided by at least one milled sponge having a plurality of layers of at least one continuous helical winding extending in a generally spiral direction around the central axis of the milled sponge.
20 Stainless steel is a preferred material for the milled sponge, since stainless steel is an electrical conductor and is resistant to chemical attack from ozone.

As would be readily understood by those
25 skilled in the art, the corona discharge at the electrodes acts upon the oxygen molecules (O_2) to produce ozone (O_3). A compact high voltage electrical power supply for the electrodes may be provided, for example, by a commercially available neon light
30 transformer. The transformer converts household power (120 VAC) to 9-12 KVAC to power the electrodes and create the electrical corona.

The dielectric tube of the ozone generator
35 may preferably be formed of a dielectric material, such as borosilicate glass (Pyrex®), separating the inner and outer electrodes. The borosilicate glass is resistant to pinholing and dielectric breakdown when

subjected to the high electric field strengths generated between the two electrodes. The dielectric tube has opposing open ends defining an inlet end and an outlet end. The inlet end permits the inflow of oxygen containing gas into the dielectric tube, and the outlet end permits the outflow of ozone from the tube.

An outer electrode surrounds the dielectric tube and preferably has an open lattice structure. The outer electrode is preferably formed of a material, such as stainless steel, that is resistant to chemical breakdown in the presence of ozone. A housing may be provided surrounding the outer electrode and communicating with the dielectric tube to capture the ozone gas generated by the outer electrode and the inner electrode.

In a first embodiment of the invention, the inner electrode fills the cross-sectional dimension of the dielectric tube underlying the outer electrode. The helical windings may also be randomly arranged to facilitate the intermixing of gas flowing through the inner electrode. Alternately, the mass of helical windings may be provided by one or more milled sponges, as described above, and positioned within the dielectric tube to define one or more layers of helical windings extending in a generally spiral orientation around the longitudinal axis of the dielectric tube.

An elongate conductor, such as a solid wire, is preferably positioned to extend through substantially the entire length of the inner electrode and in electrical contact with adjacent portions of the helical windings of the inner electrode. To support the wire, a pair of end collars are positioned on opposite ends of the tube with respective transverse extending rods connected thereto. The wire is secured to the transverse rods. The end collars also serve to define an inlet and an outlet, respectively, for gas flowing through the dielectric tube. The wire is

connected to a terminal of the high voltage electrical power supply.

5 In a second embodiment of the invention, a hollow spacer extends longitudinally in the interior of the dielectric tube. The hollow spacer has an inlet to permit a flow of oxygen containing gas into the interior of the spacer and the spacer is permeable to further permit the flow of an oxygen containing gas into the inner electrode. The spacer preferably has a
10 tubular shape and is formed of stainless steel lattice material, such as that used for the outer electrode. The inner electrode is positioned between the spacer and the dielectric tube. Thus, the hollow spacer acts as a centrally positioned elongate conductor, as well
15 as permits gas to flow into the inner electrode to thereby more efficiently cool the inner electrode.

In preliminary testing, the ozone generator according to the present invention produces a high concentration of ozone while generating little excess
20 heat in comparison to prior art ozone generators. Applicants theorize, without wishing to be bound thereto, that the mass of helical windings has greater ionization efficiency than prior art electrode configurations because the electrical corona is also
25 generated from the series of curved surfaces of the helical windings extending into the interior of the mass according to the present invention, rather than being confined to an outer electrode surface as in many of the prior art ozone generators. Mixing of the flow
30 of gas through the mass of helical windings of the inner electrode may also contribute to more uniform and efficient production of ozone for the present invention.

35 The method for generating ozone according to the invention includes the steps of: providing a first and second electrode separated by a dielectric material, wherein the second electrode comprises a mass

of helical windings as described above; electrically energizing the two electrodes; and passing a flow of oxygen containing gas through the mass of helical windings. To increase efficiency, the temperature of the output flow from the generator is preferably maintained at a temperature of not greater than 80°F, such as by controlling the flow rate or the temperature of the input gas. The input flow is preferably maintained at a temperature of less than about 50°F and has a relative humidity of not more than about 25 percent.

The method of making the ozone generator according to the invention includes positioning a mass of helical windings of electrically conductive material in the interior of the dielectric tube to form the inner electrode. For the embodiment of the ozone generator including the hollow spacer, at least one milled sponge may be expanded outwardly from the central axis to create an opening through the sponge. Then the sponge may be positioned over the spacer and released. The elastic nature of the milled sponge causes the sponge to contract and securely surround the spacer.

Brief Description of the Drawings

FIG. 1 is a perspective view of a first embodiment of an ozone generator according to the present invention.

FIG. 2 is a fragmentary side elevational view of the ozone generator as shown in FIG. 1.

FIG. 3 is a end view of the ozone generator along lines 3-3 in FIG. 2.

FIG. 4 is a greatly enlarged cross-sectional view of a portion of the mass of helical windings of the ozone generator along lines 4-4 in FIG. 3.

FIG. 5 is a fragmentary perspective view of a second embodiment of an ozone generator according to the present invention.

5 FIG. 6 is a fragmentary side elevational view of the ozone generator as shown in FIG. 5.

FIG. 7 is a end view of the ozone generator along lines 7-7 in FIG. 6.

10 FIG. 8 is a greatly enlarged cross-sectional view of a portion of the mass of helical windings of the ozone generator along lines 8-8 in FIG. 7.

Detailed Description of the Preferred Embodiments

15 The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, applicants provide these
20 embodiments so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Prime notation is used to indicate similar elements in alternate embodiments of the invention.

25 Referring to FIGS. 1-4, there is shown a first embodiment of an ozone generator according to the present invention generally designated by reference numeral 10. The ozone generator 10 includes a
30 dielectric tube 11 that separates the inner electrode 12 and the outer electrode 13. The dielectric tube 11 is preferably borosilicate glass, such as commonly available under the trademark PYREX®. The borosilicate glass has a high dielectric strength and is resistant to pinholing damage caused by the strong electric
35 fields created between the inner electrode 12 and the outer electrode 13 when the electrodes are powered.

The dielectric tube 11 may typically have about a 3 inch diameter and have a length of about 16 inches. In the illustrated embodiment, the dielectric tube 11 is shown as a cylinder having a circular cross-section; however, it would be readily understood to those having skill in the art that the tube 11 may have other cross-sectional shapes as well.

The inner electrode 12 and outer electrode 13 are connected to a high voltage electrical power supply 15, such as a conventional neon light transformer. The transformer converts 120 VAC power into 9-12 KVAC to power the electrodes 12, 13 and create the electrical corona.

As best shown in the greatly enlarged view of FIG. 4, the inner electrode 12 comprises a mass of helical windings which extends lengthwise in the interior of the dielectric tube 11 underlying the outer electrode 13. In the illustrated embodiment, the inner electrode 12 also fills the cross-sectional dimension of the dielectric tube 11. The helical windings in the mass thereof may be randomly arranged in the dielectric tube 11 as shown in the illustrated embodiment. The random arrangement and structure of the helical windings facilitate the intermixing of an oxygen containing gas passing through the inner electrode 12. The intermixing of the gas passing through the inner electrode 12 is theorized to enhance the formation of ozone while carrying away any small amounts of waste heat generated therein.

The helical windings are preferably helically wound strips of electrically conductive material, such as stainless steel, which is resistant to chemical attack from ozone. The mass of helical windings forming the inner electrode 12 may preferably be provided by one or more milled sponges of electrically conductive material. The milled sponge has a plurality of layers of at least one continuous helical winding

extending in a generally spiral direction about a central axis of the milled sponge. Several of the milled sponges may be packed into a typical dielectric tube 11 having the dimensions as provided above.

5 The radius of curvature of the helical windings is preferably in the range of about one-sixteenth to one-eighth of an inch, and preferably no more than about one-quarter of an inch. It is theorized that the formation of the inner electrode 12
10 of the mass of helical windings with the series of curved surfaces thereon has greater ionization efficiency than prior art electrodes because the electrical corona is also generated from a large number
15 of points extending into the interior of the mass, rather than being confined strictly to an outer surface portion as in typical prior art ozone generators.

 The inner electrode 12 may preferably include a wire 18, or other elongate electrical conductor, extending lengthwise therethrough. The wire 18 may
20 preferably be positioned along the axis of the dielectric tube 11 in contact with adjacent portions of the mass of helical windings of the inner electrode 12. The wire 18 extends substantially along the entire length of the inner electrode 12 and it is theorized by
25 applicants, without their wishing to be bound thereto, that the wire 18 serves to distribute the electrical power more uniformly within the mass of helical windings forming the inner electrode 12. The wire 18 is connected to one terminal of a high voltage
30 electrical power supply 15 as shown in FIG. 1.

 A pair of end collars 20a, 20b may be provided at the opposing open ends of the dielectric tube 11. The end collars 20a, 20b may be sections of
35 chlorinated polyvinyl chloride (PVC) tubing which is resistant to chemical attack from ozone. The end collars 20a, 20b have an inner diameter which closely matches the outer diameter of the dielectric tube 11 to

thereby fit thereover. The end collars 20a, 20b define inlet and outlet openings, respectively, for the ozone generator 10. The inlet permits the inflow of an oxygen containing gas, such as air, into the dielectric tube 11 and the outlet permits the outflow of ozone from the dielectric tube 11.

As shown in the end view of FIG. 3, the end collars 20a, 20b include respective transversely extending supporting rods or dowels 21a, 21b for supporting the wire 18 which extends through the helical windings of the inner electrode 12. The wire 18 may be extended to an outer radial point on an end collar 20a for connection at a crimp connection point 22 to a suitable insulated conductor 23. The insulated conductor 23 electrically connects the inner electrode 12 to the high voltage electrical power supply 15.

The outer electrode 13 is preferably formed in an open lattice structure, that is formed from an expanded metal sheet, as shown in the illustrated embodiment. The outer electrode 13 may be stainless steel which is resistant to chemical attack from ozone. The outer electrode 13 includes a connection point 25 to which an insulated conductor 26 may be connected. The insulated conductor 26 connects the outer electrode 13 to the high voltage electrical power supply 15.

Referring to FIG. 5, there is shown an ozone generating apparatus 30 according to the invention including a housing 31 surrounding a second embodiment of an ozone generator 10'. The housing 31 includes an inlet 33 for communication with a flow of an oxygen containing gas and an outlet 35 for the ozone generated by the ozone generator 10' positioned in the interior of the housing. The housing 31 includes flared end portions 34, 36, respectively, adjacent the inlet 33 and outlet 35. The housing 31 also serves to protect

personnel from the relatively high electrical voltage at the outer electrode 13' of the ozone generator 10'.

5 The housing 31 serves to collect ozone generated by the outer electrode 13'. In addition, the ozone generator 10' is positioned in spaced apart relation from the inlet 33 and outlet 35 of the housing by a series of brackets 45, or other securing means, so that the housing is in communication with the interior of the dielectric tube 11' to thereby collect ozone
10 generated by the inner electrode 12'. The spacing and relative dimensions of the ozone generator 10' and the housing 31 may be selected to provide a desired relative proportion of gas flow through the inner electrode 12' and over the outer electrode 13'.

15 As would be readily understood by those skilled in the art, the flow of gas through the ozone generating apparatus 30 may be achieved by applying positive pressure at the inlet 33, negative pressure at the outlet 35, or a combination of both. Accordingly,
20 one or more fans may be coupled to the ozone generating apparatus 30 in a conventional manner, or the outlet may be coupled to a venturi, not shown, for delivering the ozone gas into a liquid.

 It has been found that maintaining the
25 temperature of the ozone gas at the outlet 35 below about 80°F increases ozone yield, since high temperatures may cause dissociation of ozone back into oxygen. The temperature of the flow of oxygen containing gas at the inlet 33 may thus desirably
30 maintained below about 50°F and the relative humidity below about 25% to achieve greater efficiency for the illustrated embodiment.

 Referring to FIGS. 6-8, the second embodiment of the ozone generator 10' is shown in greater detail
35 with the housing 31 removed. The ozone generator 10' includes a hollow spacer 40 which is positioned extending longitudinally in the interior of the

dielectric tube 11'. The spacer 40 is preferably tubularly shaped and is positioned coaxially within the dielectric tube 11'. The open end of the spacer 40 adjacent the housing inlet 33 (FIG. 5) defines an inlet for the spacer. The spacer 40 is also permeable to the flow of gas therethrough and is preferably formed having a lattice structure as is the outer electrode 13'.

The spacer 40 is electrically conductive and is believed to more effectively distribute electrical power to the inner electrode 12'. The spacer 40 is also preferably formed of a stainless steel or other material that is resistant to chemical attack from ozone. The spacer 40 is electrically connected to a source of high voltage electrical power by a connection point 22' and an insulated conductor 23' as described above with reference to the first embodiment of the ozone generator according to the invention.

The inner electrode 12' is formed of a mass of helical windings of electrically conductive material having a series of curved surfaces thereon for generating an electrical corona as described above. In the illustrated embodiment, the mass of helical windings is provided by a series of milled sponges positioned between the spacer and the dielectric tube 11'. FIG. 8 is a greatly enlarged view showing two adjacent sponges 12a, 12b positioned in contacting relation within the dielectric tube 11'. The milled sponges may preferably be arranged so that the inner electrode 12' is formed by multiple layers of helical windings extending in a generally spiral direction around the spacer 40 as best illustrated in the end view of FIG. 7 and the greatly enlarged view of FIG. 8;

According to an aspect for the method for making the ozone generator of the present invention, each milled sponge may be expanded along its central axis to form an opening therethrough to permit

insertion of the spacer 40 into the opening. The elasticity of the milled sponge as an entity will cause the sponge to contract around the spacer 40 when released and thereby be securely fitted to the spacer.

5 To further ensure retention of the milled sponges within the dielectric tube 11', the spacer 40 may have each opposing end portion formed as shown best in the perspective view of FIG. 5 and the end view of FIG. 6. The spacer 40 is first longitudinally cut
10 inwardly at an end thereof to form four substantially equal spacer end portions. A first pair of opposing spacer end portions 40a serves to mount the spacer 40 within the end collar 20b' on the transversely
15 extending rod 21b' supported by the end collar 20b' as shown. The second pair of opposing spacer end portions 40b are folded outwardly to extend radially from the spacer 40 to the inner surface of the dielectric tube 11', thereby forming an end stop to further ensure
20 retention of the milled sponges within the dielectric tube 11'.

 Many modifications and other embodiments of the invention will come to the mind of one skilled in the art having the benefit of the teachings presented in the foregoing descriptions and the associated
25 drawings. Therefore, it is to be understood that the invention is not to be limited to the specific embodiments disclosed, and that modifications and embodiments are intended to be included within the scope of the appended claims.

CLAIMS:

1. An apparatus for generating ozone from an electrical corona in an oxygen containing gas, said apparatus comprising:

a dielectric tube;

5 an outer electrode overlying a portion of said dielectric tube; and

an inner electrode positioned in the interior of said dielectric tube and occupying a lengthwise portion thereof underlying said outer electrode, said
10 inner electrode being formed of a mass of helical windings of electrically conductive material, said mass being permeable to a flow of gas therethrough, said helical windings having a series of curved surfaces thereon for creating an electrical corona therefrom so
15 as to produce a high concentration of ozone from an oxygen containing gas passing through said mass of helical windings.

2. The apparatus according to Claim 1
20 wherein said inner electrode fills the interior cross-section of said dielectric tube.

3. The apparatus according to Claim 1
25 wherein said inner electrode substantially fills the interior lengthwise extent of said dielectric tube.

4. The apparatus according to Claim 1
wherein said helical windings are randomly arranged in said mass thereof, and wherein said helical windings
30 and the random arrangement thereof facilitate the intermixing of gas flowing therethrough.

5. The apparatus according to Claim 1
wherein said mass of helical windings is formed by at
35 least one layer of helical windings extending in a

generally spiral direction about the longitudinal axis of said dielectric tube.

40 6. The apparatus according to Claim 1
wherein said mass of helical windings comprises at least one milled sponge having a plurality of layers of at least one continuous helical winding extending in a generally spiral direction about a central axis of said milled sponge.

45 7. The apparatus according to Claim 1
further comprising an elongate electrical conductor extending through substantially the entire length of said inner electrode and positioned in electrical
50 contact with adjacent portions of said helical windings.

8. The apparatus according to Claim 7
wherein said dielectric tube has opposing open ends
55 defining an inlet end and an outlet end thereof;
wherein said inlet end permits the inflow of an oxygen containing gas into said dielectric tube; and wherein said outlet end permits the outflow of ozone gas from said dielectric tube.

60 9. The apparatus according to Claim 8
further comprising a pair of end collars positioned on respective ends of said dielectric tube; and means carried by said end collars for supporting said
65 elongate electrical conductor in the interior of said dielectric tube.

10. The apparatus according to Claim 9
wherein said means for supporting said elongate
70 electrical conductor comprises a respective rod transversely connected to each end collar on said dielectric tube.

75 11. The apparatus according to Claim 1
further comprising a housing surrounding said outer
electrode for collecting ozone gas generated by said
outer electrode.

80 12. The apparatus according to Claim 1
further comprising a housing surrounding said outer
electrode and communicating with said dielectric tube
for collecting ozone gas generated by said outer
electrode and said inner electrode.

85 13. The apparatus according to Claim 1
wherein said helical windings are formed of strip
material.

90 14. The apparatus according to Claim 1
wherein the radius of curvature of each of said helical
windings is not more than about one quarter of an inch.

95 15. The apparatus according to Claim 1
wherein said dielectric tube comprises borosilicate
glass.

16. The apparatus according to Claim 1
wherein said outer electrode has an open lattice
structure.

100 17. An apparatus for generating ozone from
an electrical corona in an oxygen containing gas, said
apparatus comprising:

a dielectric tube;

105 an outer electrode overlying a portion of
said dielectric tube;

a hollow spacer extending longitudinally in
the interior of said dielectric tube and underlying
said outer electrode, said spacer having an inlet to
permit a flow of gas into the interior of said spacer,

110 said spacer being permeable to a flow of gas
therethrough; and

an inner electrode positioned in the interior
of said dielectric tube occupying the portion thereof
between said dielectric tube and said spacer, said
115 inner electrode being formed of a mass of helical
windings of electrically conductive material, said mass
being permeable to a flow of gas therethrough, said
helical windings having a series of curved surfaces
thereon for creating an electrical corona therefrom so
120 as to produce a high concentration of ozone from an
oxygen containing gas passing through said mass of
helical windings.

18. The apparatus according to Claim 17
125 wherein said spacer comprises an electrically
conductive material positioned in electrical contact
with adjacent portions of said mass of helical
windings.

19. The apparatus according to Claim 17
130 wherein said spacer is tubularly shaped.

20. The apparatus according to Claim 17
wherein said spacer has an open lattice structure.
135

21. The apparatus according to Claim 17
wherein said helical windings are randomly arranged in
said mass thereof; and wherein said helical windings
and the random arrangement thereof facilitate the
140 intermixing of gas flowing therethrough.

22. The apparatus according to Claim 17
wherein said mass of helical windings is formed by at
least one layer of helical windings extending in a
145 generally spiral direction around said spacer.

23. The apparatus according to Claim 17 wherein said mass of helical windings comprises at least one milled sponge having a plurality of layers of at least one continuous helical winding extending in a generally spiral direction about a central axis of said milled sponge.

24. The apparatus according to Claim 17 wherein said helical windings are formed of strip material.

25. The apparatus according to Claim 17 wherein the radius of curvature of each of said helical windings is not more than about one quarter of an inch.

26. The apparatus according to Claim 17 wherein said dielectric tube has opposing open ends defining an inlet end and an outlet end thereof; wherein said inlet end permits the inflow of an oxygen containing gas into said dielectric tube; and wherein said outlet end permits the outflow of ozone gas from said dielectric tube.

27. The apparatus according to Claim 26 further comprising a pair of end collars positioned on respective ends of said dielectric tube; and means carried by said end collars for supporting said spacer in the interior of said dielectric tube.

28. The apparatus according to Claim 27 wherein said means for supporting said spacer comprises a respective rod transversely connected to each end collar on said dielectric tube.

29. The apparatus according to Claim 17 further comprising a housing surrounding said outer

electrode for collecting ozone gas generated by said outer electrode.

185

30. The apparatus according to Claim 17 further comprising a housing surrounding said outer electrode and communicating with said dielectric tube for collecting ozone gas generated by said outer electrode and said inner electrode.

190

31. The apparatus according to Claim 17 wherein said dielectric tube comprises borosilicate glass.

195

32. The apparatus according to Claim 17 wherein said outer electrode has an open lattice structure.

200

33. An apparatus for generating ozone from an electrical corona in an oxygen containing gas, said apparatus comprising:

a first electrode;

a second electrode positioned opposite and in

205 a spaced apart relation from said first electrode; and dielectric material positioned between said first and second electrodes;

210 said second electrode being formed of a mass of helical windings of electrically conductive material, said mass being permeable to a flow of gas therethrough, said helical windings having a series of curved surfaces thereon for creating an electrical corona therefrom so as to produce a high concentration of ozone from an oxygen containing gas.

215

34. The apparatus according to Claim 33 wherein said dielectric material comprises borosilicate glass.

220

35. The apparatus according to Claim 33 wherein said helical windings are randomly arranged in said mass thereof, and wherein said helical windings and the random arrangement thereof facilitate the intermixing of gas flowing therethrough.

225

230

36. The apparatus according to Claim 33 wherein said mass of helical windings comprises at least one milled sponge having a plurality of layers of at least one continuous helical winding extending in a generally spiral direction about a central axis of said milled sponge.

235

37. The apparatus according to Claim 33 wherein said helical windings are formed of strip material.

240

38. The apparatus according to Claim 33 wherein the radius of curvature of each of said helical windings is not more than about one quarter of an inch.

245

39. The apparatus according to Claim 33 wherein said first electrode has an open lattice structure.

250

40. A method for generating ozone from an oxygen containing gas comprising the steps of:
providing a first electrode and a second electrode separated by a dielectric material, the second electrode being formed of a mass of helical windings having a series of curved surfaces thereon, the mass of helical windings being permeable to a flow of gas therethrough;

255

energizing the first and second electrodes with high voltage electrical power to generate an electrical corona from the series of curved surfaces of

the mass of helical windings of the second electrode;
and

260 passing an input flow of an oxygen containing
gas into the mass of helical windings of the second
electrode so as to generate an output gas flow
therefrom containing ozone.

265 41. The method according to Claim 40 further
comprising the step of maintaining the temperature of
the output gas flow at a temperature of not greater
than about 80°F to thereby reduce the dissociation of
ozone in the output gas flow.

270 42. The method according to Claim 40 further
comprising the step of maintaining the temperature of
the input flow of the oxygen containing gas at a
temperature of not greater than about 50°F to thereby
reduce the dissociation of ozone in the output gas
flow.

275 43. The method according to Claim 40 further
comprising the step of maintaining the humidity of the
output gas flow at a relative humidity of not greater
than about 25 percent.

280 44. The method according to Claim 40 further
comprising the step of passing a portion of the input
flow of oxygen containing gas over the first electrode
to generate ozone gas therefrom.

285 45. A method for making an ozone generator
including a dielectric tube, an outer electrode
surrounding the dielectric tube, and an inner electrode
in the interior of the dielectric tube, said method
290 comprising the step of positioning a mass of helical
windings of electrically conductive material in the

interior of the dielectric tube to form the inner electrode.




295 46. The method according to Claim 45 wherein
the step of positioning a mass of helical windings in
the interior of the dielectric tube comprises the steps
of positioning in the interior of the dielectric tube
at least one milled sponge having a plurality of layers
300 of at least one continuous helical winding extending in
a generally spiral direction about a central axis of
the milled sponge.


305 47. The method according to Claim 46 further
comprising the step of positioning a hollow tubular
spacer longitudinally extending in the interior of the
dielectric tube; and wherein the step of positioning
the at least one milled sponge in the interior of the
dielectric tube comprises the step of expanding the at
310 least one milled sponge to form an opening along the
central axis thereof and positioning the hollow tubular
spacer within the thus formed opening of the milled
sponge.

OZONE GENERATOR HAVING AN ELECTRODE
FORMED OF A MASS OF HELICAL WINDINGS
AND ASSOCIATED METHOD

Abstract of The Disclosure

An apparatus and method for producing a high concentration of ozone gas using an electrical corona discharge in the presence of an oxygen containing gas. The generator includes a first and second electrode separated by a dielectric tube, each electrode being adapted to be connected to a high voltage AC power supply. The first electrode preferably has a lattice structure and surrounds the dielectric tube. The second electrode is formed of a mass of helical windings with a series of curved surfaces thereon. The second electrode is positioned within the dielectric tube underlying the first electrode. The curved surfaces of the helical windings create a corona therefrom. In one embodiment of the ozone generator, the mass of helical windings is provided by at least one milled sponge having a plurality of layers of a continuous helical winding extending in a generally spiral direction about a central axis of the milled sponge. The mass of helical windings also facilitates the intermixing of the oxygen containing gas passing therethrough. The generator produces a high concentration of ozone and a small amount of waste heat, yet has a simple, reliable and rugged construction.

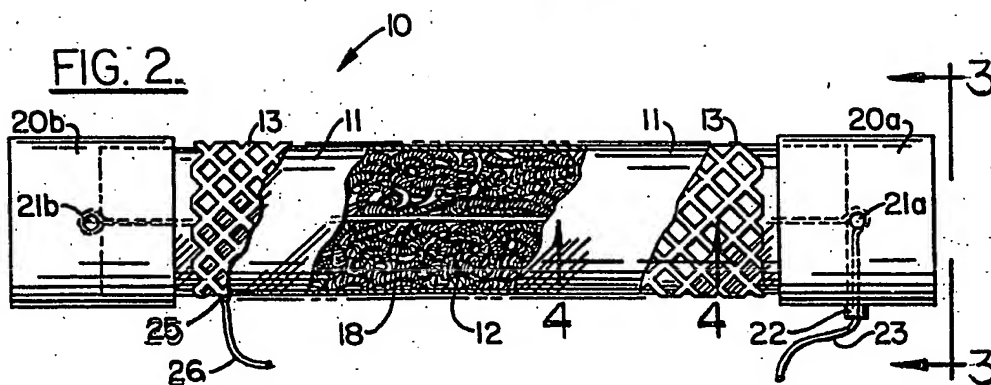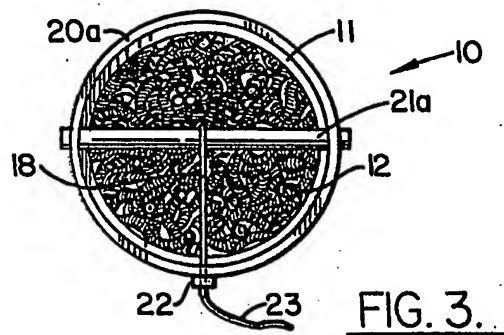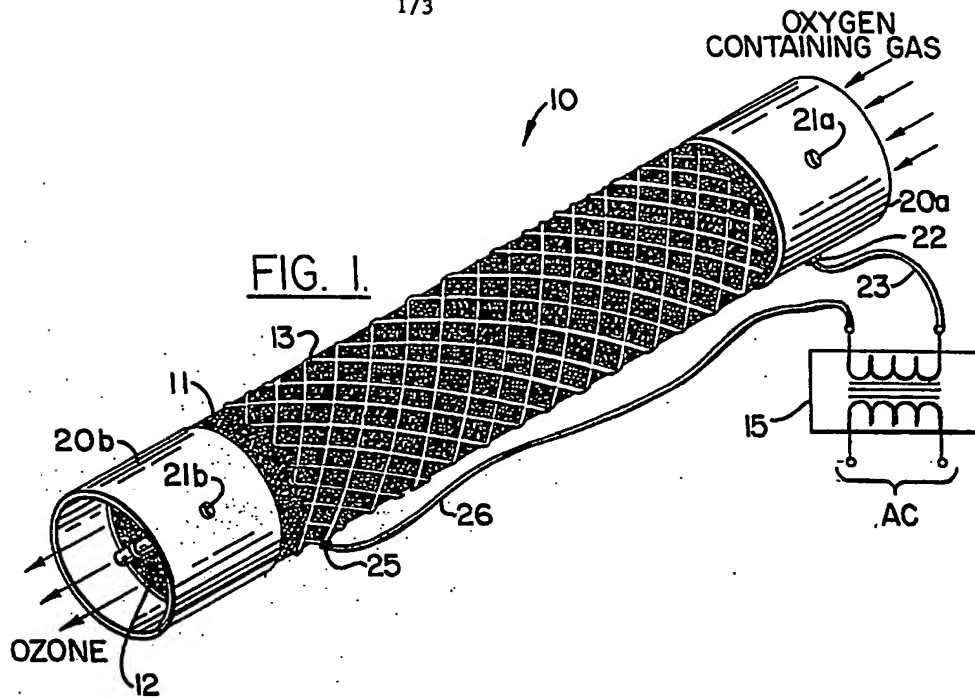

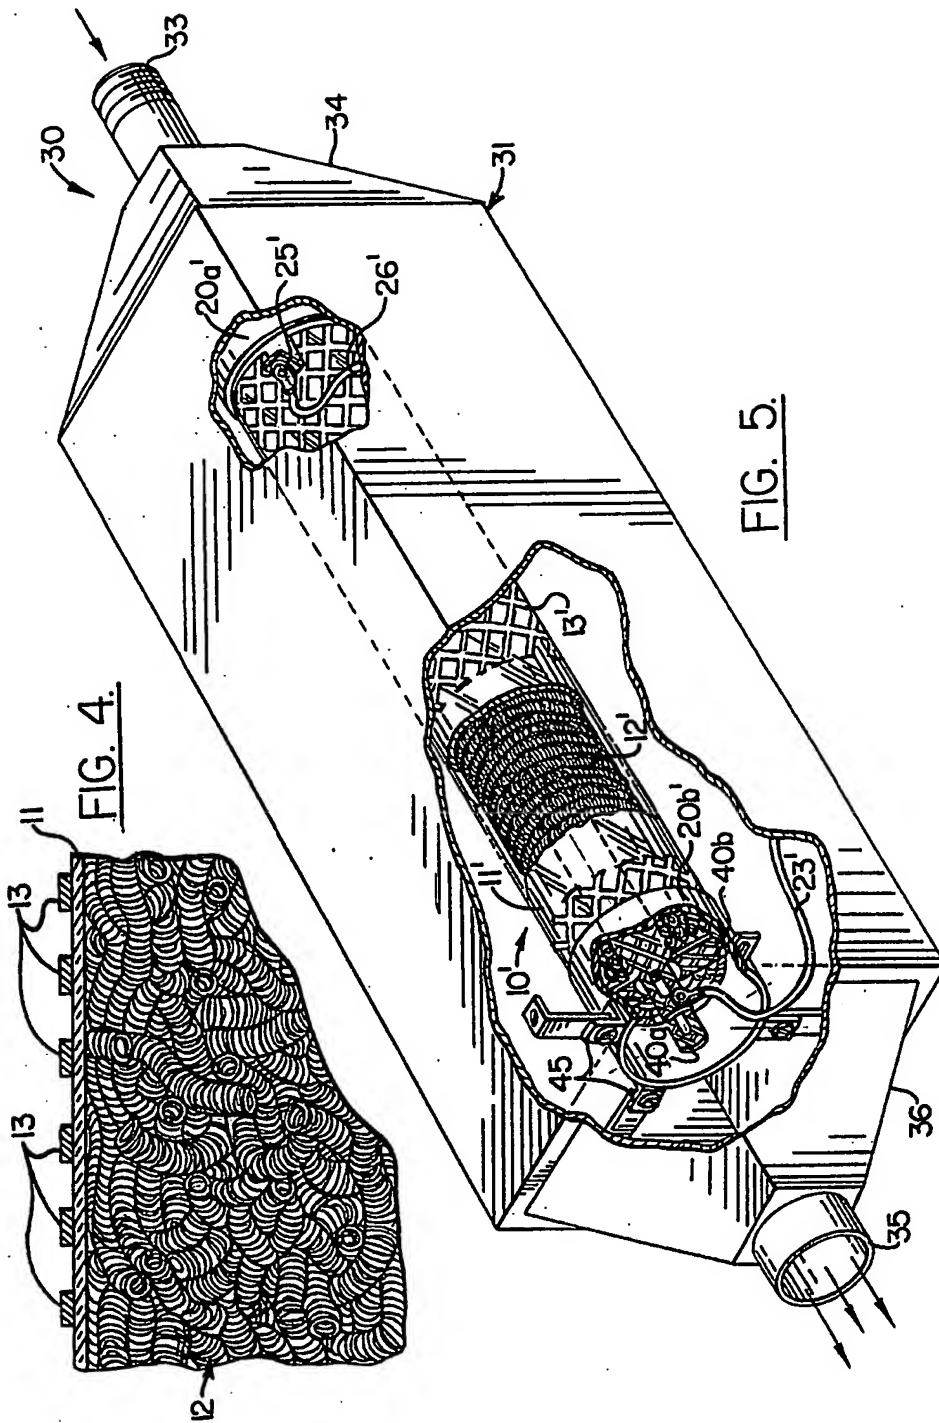

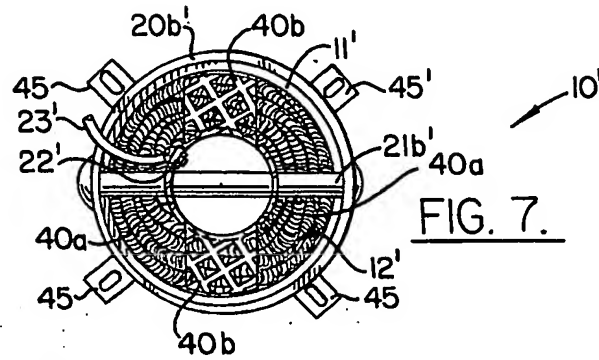


FIG. 7.

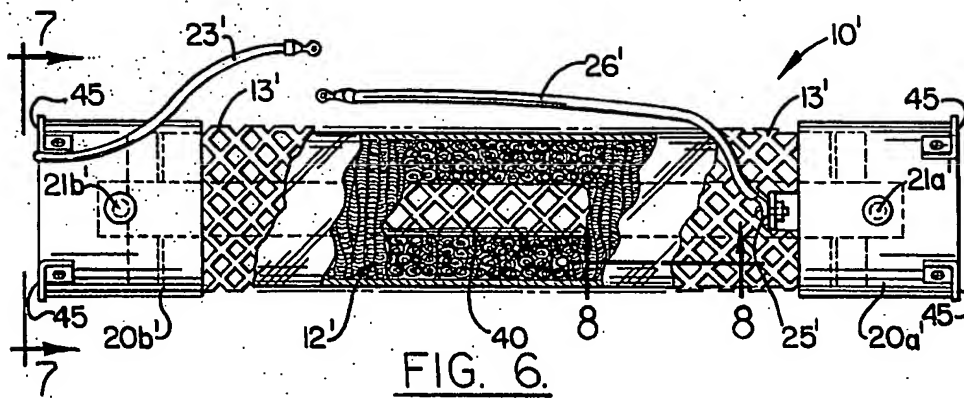


FIG. 6.

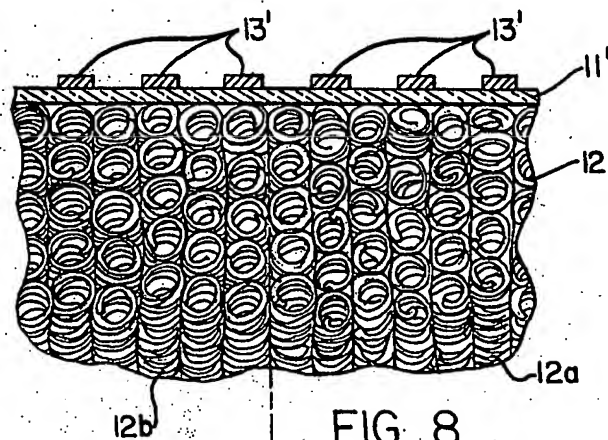


FIG. 8.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.